

Object	Potable water treatment
Project	Ultrafiltration
Place	1095 Lutry, Switzerland
Date of installation	2002/2003
Building Authority	Industrial Services, City of Lausanne
Planner	Ondeo Dégromont, 1762 Givisiez
Building Contractor	Techno Tube SA, 1870 Monthey


Type of line	Cold water in stainless steel
Product	STRAUB-GRIP-L, STRAUB-FLEX
Diameter Ø	60.3 mm – 609.9 mm
Sealing sleeve	<input checked="" type="checkbox"/> EPDM Drinking water quality
Casing	1.4571
Lock parts	<input checked="" type="checkbox"/> Stainless steel <input type="checkbox"/> galvanized
Working pressure	Up to 6 bar
Test pressure	Up to 9 bar
Remarks	

Situation:	Connecting of prefabricated stainless steel parts without welding
Solution:	STRAUB couplings
Customer benefits:	<ul style="list-style-type: none"> - Fast progress - No pipe end preparation



No noise transfer on the joint to the collector

Easy to install also in narrow spaces
and close to wall channels

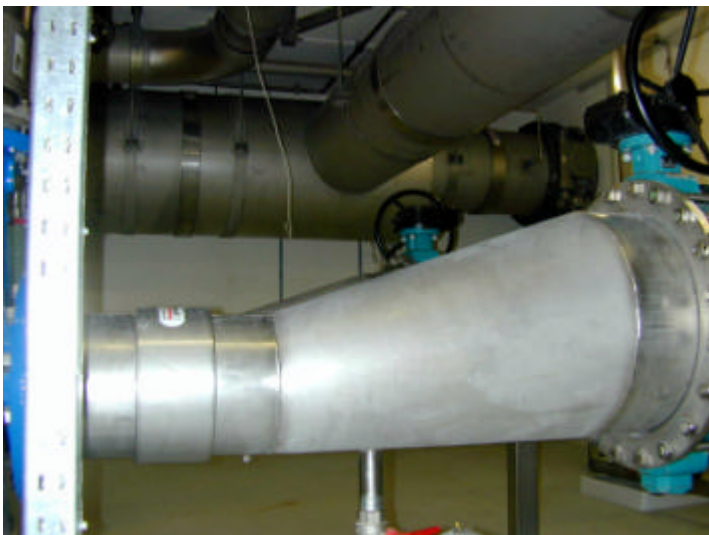

Installation tolerances can be easily compensated
by the STRAUB-FLEX 2 LS 914.4 mm.

STRAUB-GRIP-L 219.1 mm and 355.6 mm






Ultra-filtration module connected by STRAUB-GRIP-L
 323.9 mm.



No tension transfer on connections

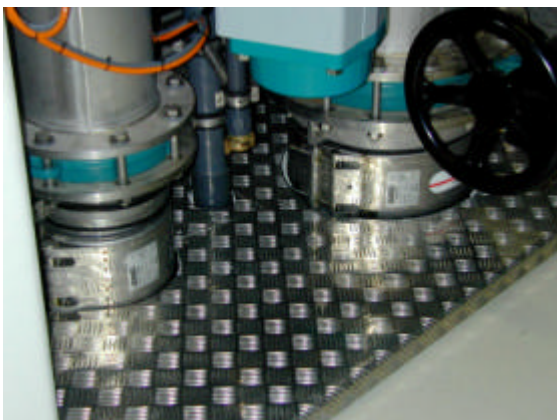

Easy connections close to the floor